

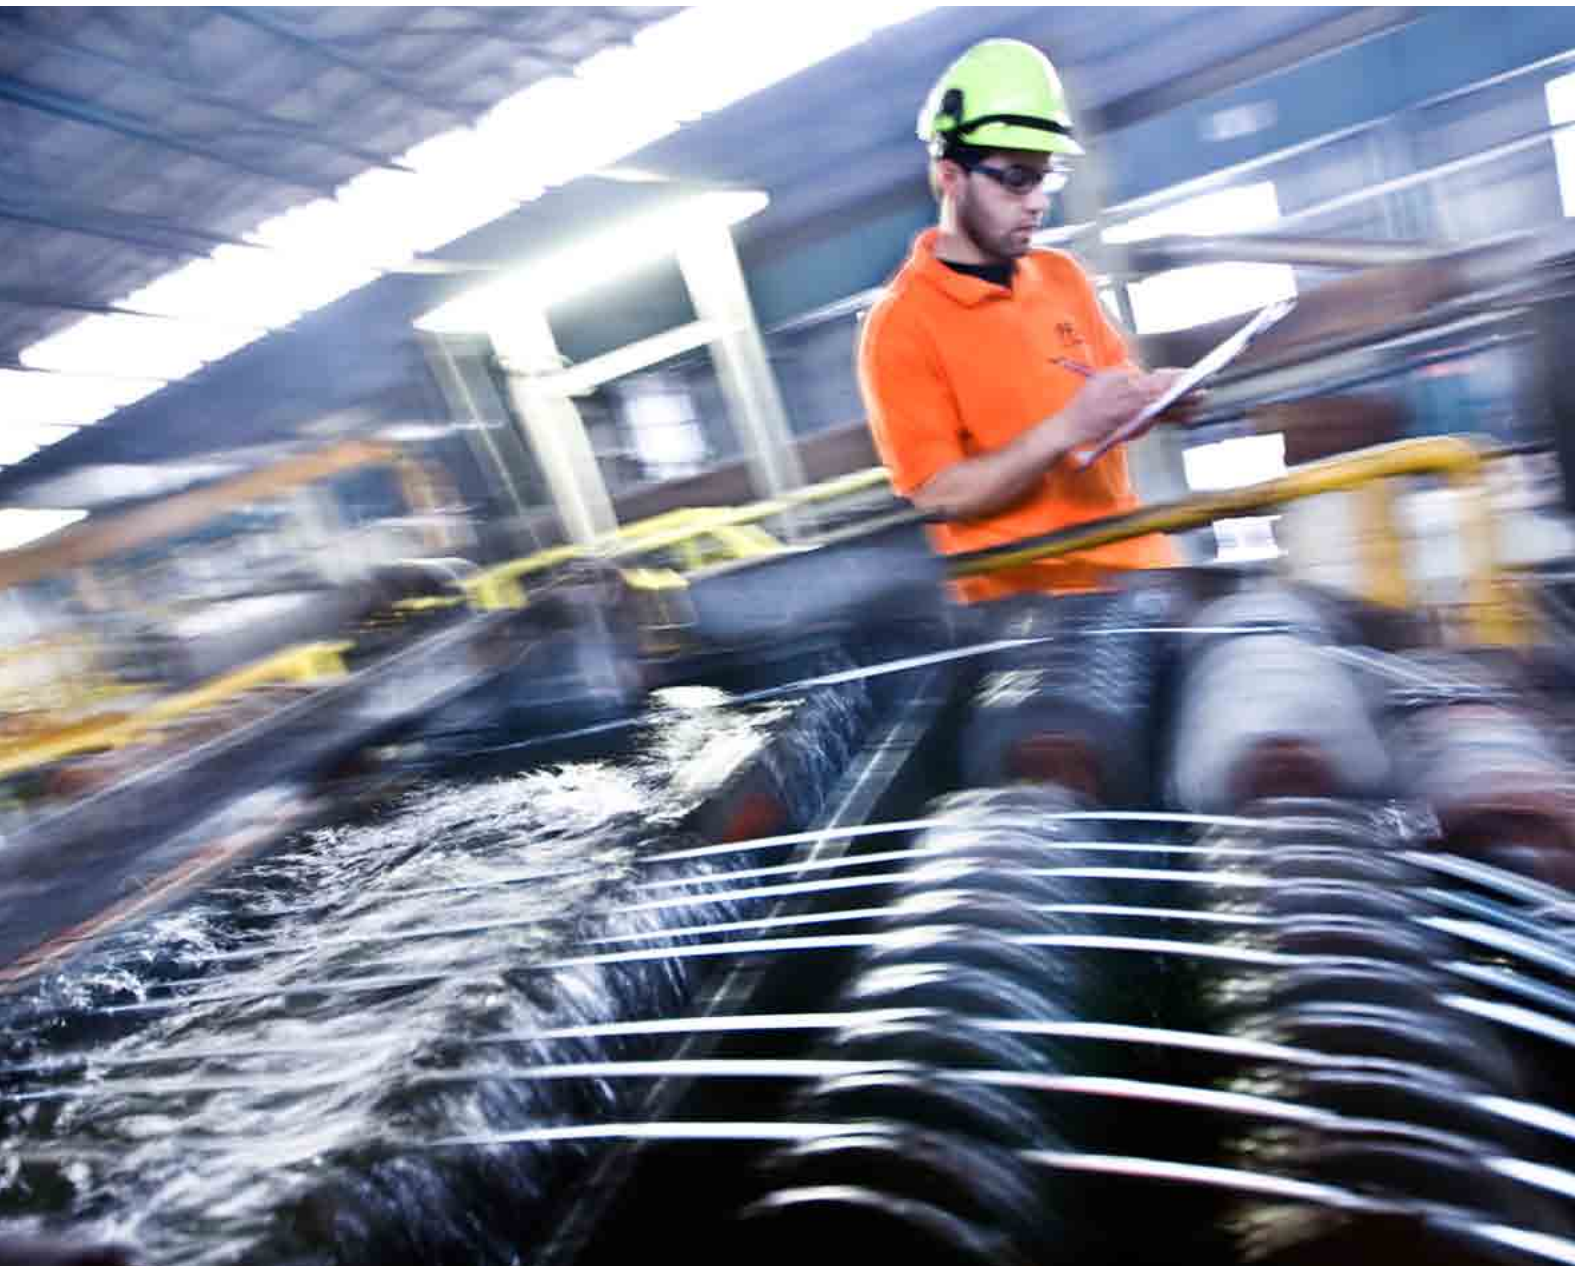


High corrosion  
resistance  
(2,5/3 times higher)  
VS  
standard zinc  
coating

WIRE ROD AND  
STEEL WIRE  
Zn/Al 5% alloy coated

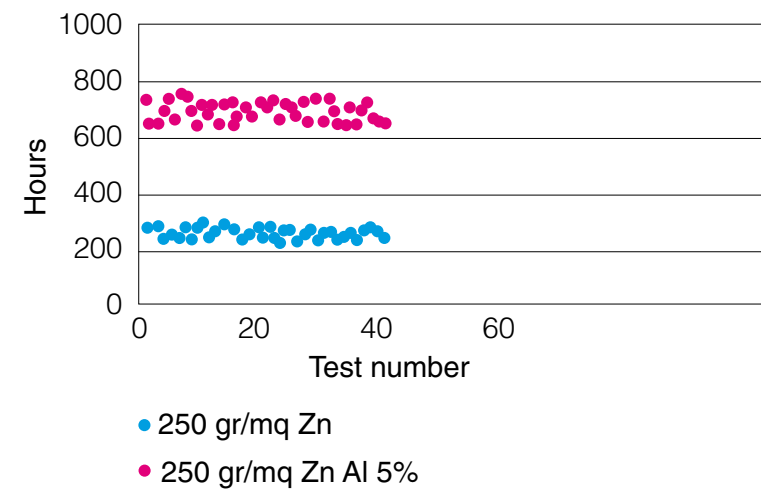

Hours in saltspray according to ASTM B117

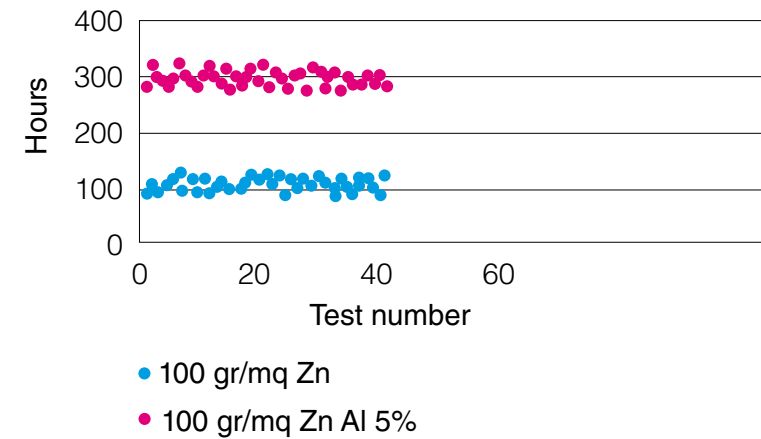

**coating applicable to:**

Patented **Zn/Al** coated  
WIRE ROD

Range 5,50mm - 17,00mm

Grade C 0,30% up to C 0,92% for redrawing

Patented **Zn/Al** coated  
SEMIFINISHED STEEL WIRE

Range 2,00mm - 10,00mm

Grade C 0,30% up to C 0,92% for redrawing

Patented **Zn/Al** coated  
FINISHED STEEL WIRE

Range 2,00mm - 15,00mm

Tensile strength up to 2260 Mpa

Patented **Zn/Al** coated  
SHAPED / FLAT STEEL WIRE

H 3,00mm - H 6,00mm

Tensile strength up to 1770 Mpa